



## S.SR - NASADKI 1/2" 12-KĄTNE CALOWE ADF

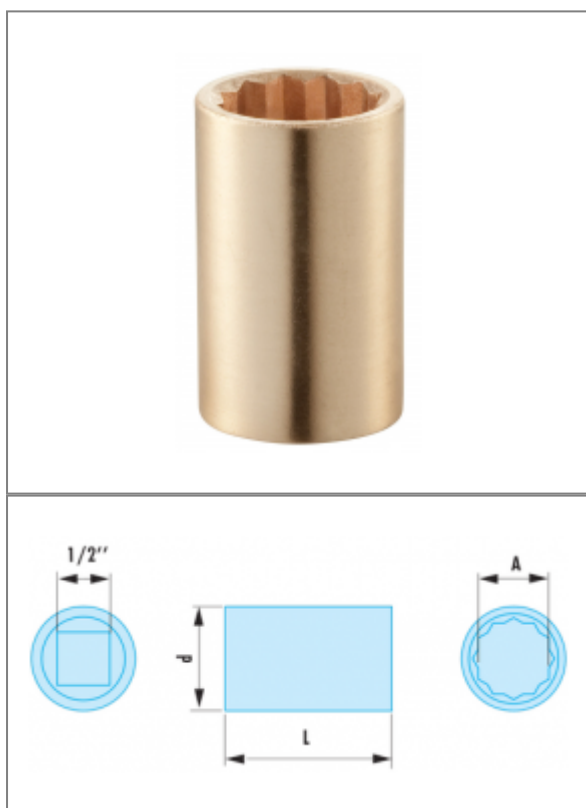

### Opis :

- Specjalny stop miedzi i berylu, nieiskrzący i antymagnetyczny.

### Referencje :

	d maks. [mm]	L [mm]	[g]
<b>S.5/16SR</b>	24	40	78
<b>S.3/8SR</b>	24	40	78
<b>S.7/16SR</b>	24	40	79
<b>S.1/2SR</b>	24	40	79
<b>S.9/16SR</b>	24	40	80
<b>S.5/8SR</b>	25	40	90
<b>S.11/16SR</b>	26	40	95
<b>S.3/4SR</b>	28	42	100
<b>S.13/16SR</b>	30	43	120
<b>S.7/8SR</b>	32	43	140
<b>S.15/16SR</b>	34	43	150
<b>S.1PSR</b>	36	43	100
<b>S.1P1/16SR</b>	38	46	240
<b>S.1P1/4SR</b>	43	46	275
<b>S.1P7/16SR</b>	49	50	310