



### 1223.E - Imadła monterskie stałe



- Charakterystyki identyczne jak dla modelu 1223, ale nieobrotowe.

№	H [mm]	ΔΔ [kg]
<b>1223.105E</b>	130	7,000
<b>1223.125E</b>	152	10,500
<b>1223.150E</b>	182	18,700


### 1223.M - Zestawy szczęk

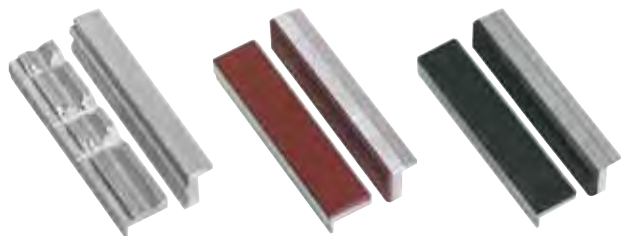

- Przystosowane do imadeł 1222 i 1223.
- Mocowanie magnetyczne na imadle.
- Materiał:
  - 1223.M1 - 1223.M2: Aluminium z rowkami pryzmowymi.
  - 1223.M3 - 1223.M4: Włókno.
  - 1223.M5 - 1223.M6: Guma.

№	L [mm]	ΔΔ [g]
<b>1223.M1</b>	125	200
<b>1223.M2</b>	150	240
<b>1223.M3</b>	125	200
<b>1223.M4</b>	150	240
<b>1223.M5</b>	125	200
<b>1223.M6</b>	150	240

### 283 - Imadło do rur



- Podstawa, jarzmo, hak i prowadnica z żeliwa ciągliwego.
- Śruba ze stali półtwardej z gwintem prostokątnym.
- Szczęki wymienne ze stali specjalnej hartowanej.

№	A [mm]	A ["]	H [mm]	L [mm]	L1 [mm]	ΔΔ [kg]
<b>283.2</b>	10 - 60	1/8 - 2	205	185	130	3,500
<b>283.3</b>	13 - 90	1/4 - 3	265	240	150	5,900

