


Nasadki 3/4" ADF


▣ K.SR - Nasadki 3/4" 12-kątne metryczne ADF

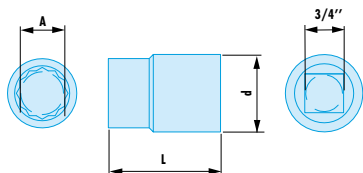

- Specjalny stop miedzi i berylu, nieiskrzący i antymagnetyczny.

⇒	A [mm]	d maks. [mm]	L [mm]	ΔΔ [g]
K.17SR	17	38	50	246
K.19SR	19	38	50	246
K.21SR	21	38	55	268
K.22SR	22	38	55	268
K.23SR	23	40	55	306
K.24SR	24	40	55	307
K.26SR	26	40	55	307
K.27SR	27	40	55	312
K.28SR	28	41	55	339
K.29SR	29	42	55	350
K.30SR	30	43	60	410
K.32SR	32	45	60	465
K.34SR	34	48	60	480
K.36SR	36	50	60	510
K.38SR	38	53	60	555
K.41SR	41	57	65	660
K.46SR	46	63	65	830
K.50SR	50	68	70	945

▣ K.SR - Nasadki 3/4" 12-kątne calowe ADF

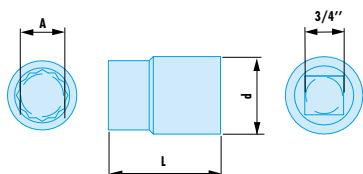

- Specjalny stop miedzi i berylu, nieiskrzący i antymagnetyczny.

⇒	d maks. [mm]	L [mm]	ΔΔ [g]
K.3/4SR	38	50	240
K.13/16SR	38	55	262
K.7/8SR	38	55	267
K.15/16SR	40	55	305
K.1PSR	40	55	310
K.1P1/16SR	40	55	315
K.1P1/8SR	43	55	245
K.1P3/16SR	44	60	400
K.1P1/4SR	46	60	437
K.1P5/16SR	48	60	472
K.1P3/8SR	50	60	515
K.1P7/16SR	52	60	525
K.1P1/2SR	54	60	580
K.1P5/8SR	58	65	702
K.1P3/4SR	62	65	761
K.1P13/16SR	63	65	830
K.1P7/8SR	66	65	850
K.2PSR	69	70	930