


Nasadki 1" ADF


M.SR - Nasadki 1" 12-kątne metryczne ADF

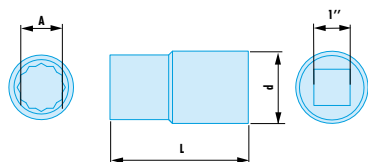

- Specjalny stop miedzi i berylu, nieiskrzący i antymagnetyczny.

➤	A [mm]	d maks. [mm]	L [mm]	ΔΔ [g]
M.22SR	22	48	55	360
M.24SR	24	48	55	370
M.26SR	26	48	55	380
M.27SR	27	48	55	395
M.28SR	28	48	55	400
M.29SR	29	48	55	400
M.30SR	30	48	60	445
M.31SR	31	48	60	450
M.32SR	32	48	60	480
M.34SR	34	50	60	500
M.36SR	36	52	65	505
M.38SR	38	55	65	570
M.41SR	41	58	70	630
M.46SR	46	64	75	785
M.50SR	50	68	75	890
M.55SR	55	74	80	1090
M.60SR	60	81	85	1220
M.65SR	65	88	90	1455
M.70SR	70	95	90	1550
M.75SR	75	103	95	2160
M.80SR	80	110	95	2405

M.SR - Nasadki 1" 12-kątne calowe ADF

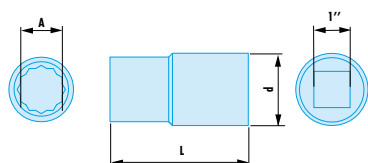

- Specjalny stop miedzi i berylu, nieiskrzący i antymagnetyczny.

➤	d maks. [mm]	L [mm]	ΔΔ [g]
M.1P1/16SR	48	55	395
M.1P1/8SR	48	55	400
M.1P3/16SR	48	60	445
M.1P1/4SR	48	60	470
M.1P5/16SR	48	60	485
M.1P3/8SR	50	60	490
M.1P7/16SR	52	65	520
M.1P1/2SR	55	65	500
M.1P5/8SR	58	70	635
M.1P7/8SR	66	75	780
M.2PSR	68	75	910
M.2P1/4SR	77	80	1190
M.2P1/2SR	85	90	1375
M.2P3/4SR	95	90	1505
M.3PSR	104	95	1670

