

## R - NASADKI 1/4" 6-KĄTNE METRYCZNE




### Norme :

**NF ISO 2725-1, NF ISO 1711-1, ISO 2725-1, ISO 1711-1, DIN 3124, ASME B107.5**

### Opis :

- Profil OGV®: większa siła i bezpieczeństwo, ochrona nakrętek.
- Wykończenie: chromowane błyszczące.
- Dostępne w zestawie na stojaku metalowym (symbol R.40E).

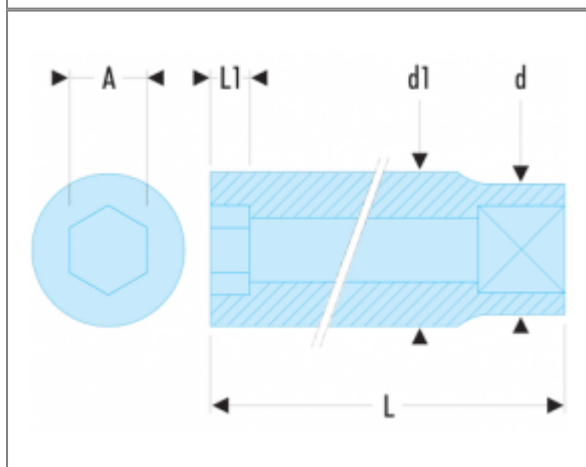

### Referencje :

	A [mm]	d [mm]	d1 [mm]	L [mm]	L1 [mm]	6-kątny [mm]	[g]
<b>R.3,2</b>	3,2	11,2	5,9	22	2,4	6	7,30
<b>R.4</b>	4,0	11,2	6,9	22	2,6	6	7,70
<b>R.5</b>	5,0	11,2	8,2	22	4,8	6	8,10
<b>R.5,5</b>	5,5	11,2	8,8	22	4,8	6	8,40
<b>R.6</b>	6,0	11,2	9,4	22	5,6	6	8,60
<b>R.7</b>	7,0	11,0	11,0	22	6,0	6	9,20
<b>R.8</b>	8,0	12,0	12,0	22	6,5	6	11,50
<b>R.9</b>	9,0	13,2	13,2	22	6,5	6	14,30
<b>R.10</b>	10,0	14,7	14,7	22	7,8	6	17,70
<b>R.11</b>	11,0	15,8	15,8	22	9,0	6	19,40
<b>R.12</b>	12,0	17,0	17,0	22	9,50	6	23,20
<b>R.13</b>	13,0	17,7	17,7	22	10,00	6	23,70
<b>R.14</b>	14,0	18,7	18,7	22	10,00	6	26,10