


AD - WKREŃAK ISORYŁ DO ŚRUB KRZYŻAKOWYCH POZIDRIV®

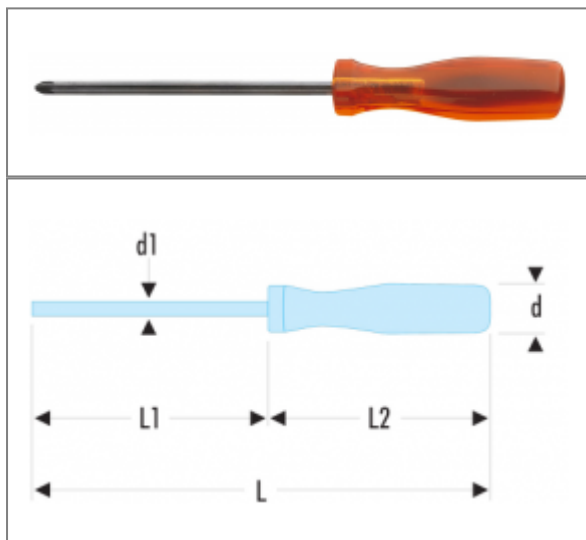

Norme :

NF ISO 8764-1, NF ISO 8764-2, ISO 8764-1, ISO 8764-2, DIN ISO 8764-1, DIN ISO 8764-2, ASME B107.600

Opis :

- Groty ze stali stopowej o wysokiej wytrzymałości.
- Wykończenie: czernione.

Referencje :

	Pozidriv [Nr]	d [mm]	d1 x L1 [mm]	L [mm]	L2 [mm]	[g]
AD.0X50	PZ0	20,5	4 x 50	130	95	31
AD.1X75	PZ1	24,0	4 x 75	165	95	55
AD.2X100	PZ2	28,0	6 x 100	200	95	77
AD.2X125	PZ2	28,0	6 x 125	225	63	81
AD.3X150	PZ3	30,0	8 x 150	260	63	142