


## 82H - KLUCZE TRZPIENIOWE KRÓTKIE CALOWE

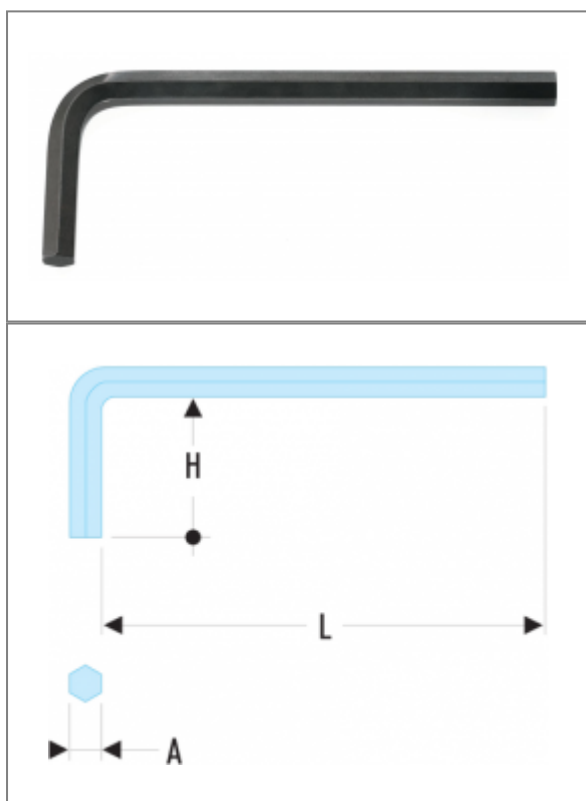


### Norme :


**ASME B18.3**

### Opis :

- Wytwarzane ze stali krzemowej.
- Wykończenie: fosforanowane.

### Referencje :

	A ["]	H [mm]	L [mm]	[g]
<b>82H.050</b>	0.5	12	38	0.4
<b>82H.3/64</b>	3/64	12	38	0.5
<b>82H.1/16</b>	1/16	13	45	0.7
<b>82H.5/64</b>	5/64	16	50	2
<b>82H.3/32</b>	3/32	17	62	3
<b>82H.7/64</b>	7/64	18	60	4
<b>82H.1/8</b>	1/8	20	65	6
<b>82H.9/64</b>	9/64	22	66	8
<b>82H.5/32</b>	5/32	25	70	10
<b>82H.3/16</b>	3/16	28	80	16
<b>82H.7/32</b>	7/32	32	90	24
<b>82H.1/4</b>	1/4	32	90	33
<b>82H.5/16</b>	5/16	36	100	59
<b>82H.3/8</b>	3/8	40	112	90
<b>82H.7/16</b>	7/16	42	118	135,00
<b>82H.1/2</b>	1/2	45	125	202
<b>82H.9/16</b>	9/16	55	140	273,00
<b>82H.5/8</b>	5/8	60	160	383
<b>82H.11/16</b>	11/16	63	170	540,00

	A ["]	H [mm]	L [mm]	[g]
<b>82H.3/4</b>	3/4	70	175	623,00
<b>82H.7/8</b>	7/8	80	200	955
<b>82H.1'</b>	1'	90	235	1450,00