



M.SR - NASADKI 1" 12-KĄTNE CALOWE ADF

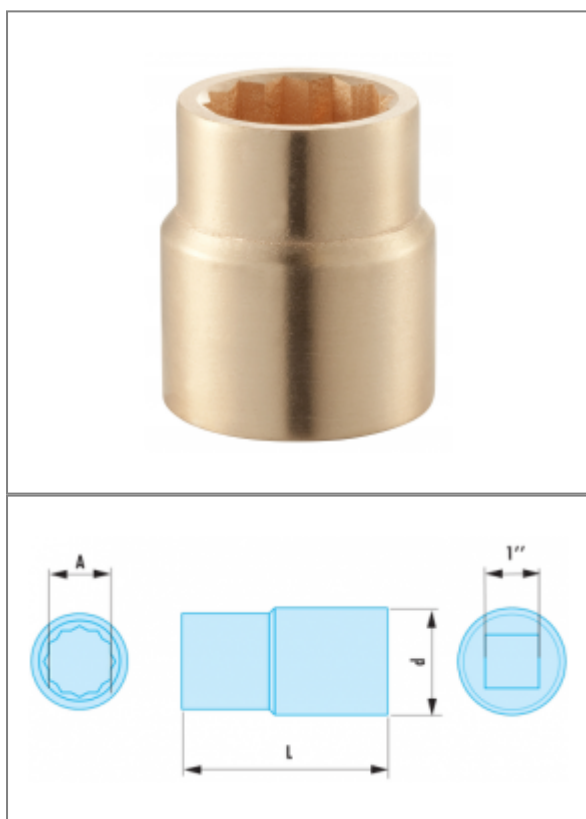

Opis :

- Specjalny stop miedzi i berylu, nieiskrzący i antymagnetyczny.

Referencje :

	d maks. [mm]	L [mm]	[g]
M.1P1/16SR	48	55	395
M.1P1/8SR	48	55	400
M.1P3/16SR	48	60	445
M.1P1/4SR	48	60	470
M.1P5/16SR	48	60	485
M.1P3/8SR	50	60	490
M.1P7/16SR	52	65	520
M.1P1/2SR	55	65	500
M.1P5/8SR	58	70	635
M.1P7/8SR	66	75	780
M.2PSR	68	75	910
M.2P1/4SR	77	80	1190
M.2P1/2SR	85	90	1375
M.2P3/4SR	95	90	1505
M.3PSR	104	95	1670